


1.4310 / 301 Tensile Range *

(please call us to discuss Tensile Range and thickness tolerance for 1.4301 /304 and 1.4404 / 316L)

Thickness	Thickness Tolerance	Tensile Range MPa (Megapascals) N/mm2 (newton/square millimetre)	Rockwell HRc **
0.003mm	+/-0.001mm	Please Ask	
0.005mm	+/-0.001mm	>1500	>46.4
0.008mm	+/-0.002mm	>1500	>46.4
0.010mm	+/-0.002mm	>1500	>46.4
0.0127mm	+/-0.0015mm	>1300	>41
0.015mm	+/-0.002mm	>1500	>46.4
0.020mm	+/-0.002mm	>1500	>46.4
0.025mm	+/-0.002mm	1500-1700	46.4 - 50.5
0.025mm	+/-0.004mm	>1300	>41
0.030mm	+/-0.003mm	>1500	>46.4
0.035mm	+/-0.003mm	1500-1700	46.4 - 50.5
0.040mm	+/-0.003mm	1300-1700	41 - 50.5
0.045mm	+/-0.003mm	1300-1700	41 - 50.5
0.050mm	+/-0.003mm	1500-1700	46.4 - 50.5
0.055mm	+/-0.003mm	1500-1700	46.4 - 50.5
0.060mm	+/-0.003mm	1500-1700	46.4 - 50.5
0.070mm	+/-0.004mm	1500-1700	46.4 - 50.5
0.075mm	+/-0.004mm	1500-1700	46.4 - 50.5
0.080mm	+/-0.004mm	1500-1700	46.4 - 50.5
0.090mm	+/-0.004mm	1500-1700	46.4 - 50.5
0.100mm	+/-0.004mm	1500-1700	46.4 - 50.5
0.110mm	+/-0.004mm	1500-1700	46.4 - 50.5
0.120mm	+/-0.004mm	1500-1700	46.4 - 50.5
0.127mm	+/-0.0065mm	1300-1500	41 - 46.4
0.130mm	+/-0.005mm	1500-1700	46.4 - 50.5
0.140mm	+/-0.005mm	1500-1700	46.4 - 50.5
0.150mm	+/-0.005mm	1500-1700	46.4 - 50.5
0.160mm	+/-0.005mm	1500-1700	46.4 - 50.5
0.170mm	+/-0.005mm	1500-1700	46.4 - 50.5
0.180mm	+/-0.005mm	1500-1700	46.4 - 50.5
0.190mm	+/-0.005mm	1500-1700	46.4 - 50.5
0.200mm	+/-0.006mm	1500-1700	46.4 - 50.5
0.210mm	+/-0.006mm	1500-1700	46.4 - 50.5
0.220mm	+/-0.008mm	1500-1700	46.4 - 50.5
0.230mm	+/-0.008mm	1500-1700	46.4 - 50.5
0.240mm	+/-0.006mm	1500-1700	46.4 - 50.5
0.250mm	+/-0.007mm	1500-1700	46.4 - 50.5
0.260mm	+/-0.007mm	1500-1700	46.4 - 50.5
0.270mm	+/-0.009mm	1500-1700	46.4 - 50.5
0.280mm	+/-0.009mm	1500-1700	46.4 - 50.5
0.290mm	+/-0.007mm	1500-1700	46.4 - 50.5
0.300mm	+/-0.007mm	1500-1700	46.4 - 50.5
0.350mm	+/-0.008mm	1500-1700	46.4 - 50.5
0.381mm	+/-0.025mm	1300-1500	41 - 46.4
0.400mm	+/-0.009mm	1500-1700	46.4 - 50.5
0.450mm	+/-0.009mm	1500-1700	46.4 - 50.5
0.500mm	+/-0.012mm	1500-1700	46.4 - 50.5
0.550mm	+/-0.012mm	1500-1700	46.4 - 50.5
0.600mm	+/-0.012mm	1500-1700	46.4 - 50.5
0.635mm	+/-0.025mm	1300-1500	41 - 46.4
0.650mm	+/-0.012mm	1500-1700	46.4 - 50.5
0.700mm	+/-0.012mm	1500-1700	46.4 - 50.5
0.750mm	+/-0.012mm	1500-1700	46.4 - 50.5
0.800mm	+/-0.013mm	1500-1700	46.4 - 50.5
0.850mm	+/-0.013mm	1500-1700	46.4 - 50.5
0.900mm	+/-0.013mm	1500-1700	46.4 - 50.5
0.950mm	+/-0.013mm	1500-1700	46.4 - 50.5
1.000mm	+/-0.018mm	1500-1700	46.4 - 50.5
1.200mm	+/-0.018mm	1100-1300	34.5 - 41
1.400mm	+/-0.022mm	1300-1500	41 - 46.4
1.500mm	+/-0.022mm	1100-1300	34.5 - 41
1.600mm	+/-0.026mm	1300-1500	41 - 46.4
1.800mm	+/-0.026mm	1300-1500	41 - 46.4
2.000mm	+/-0.028mm	1100-1300	34.5 - 41
2.500mm	+/-0.030mm	1100-1400	34.5 - 44
3.000mm	+/-0.030mm	1100-1300	34.5 - 41

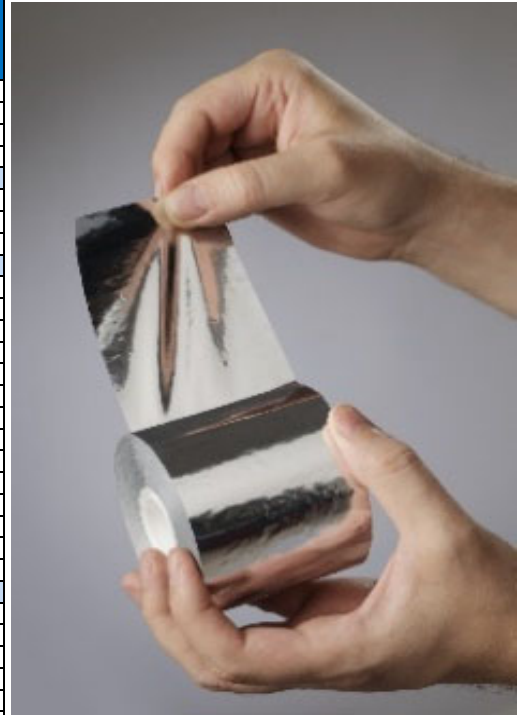

 = 1.4310 / 301
 = Tensile Range for 1.4301 / 304 Stock Only
 * unless stated

** ISO 18265:2013 - Metallic materials — Conversion of hardness values

Please call for tensile ranges for 1.4310 and 304 / 1.4301 and 316L / 1.4404

Information given in this data sheet may be subject to alterations without notice. Care has been taken to ensure that the contents of this publication are accurate but Hollinbrow Precision Products (UK) Ltd do not accept responsibility for errors or for information that is found to be misleading. Suggestions for or descriptions of the end use or application of products or methods of working are for information only and Hollinbrow Precision Products (UK) Ltd accept no liability in respect thereof. Before using products supplied or manufactured by the company the customer should satisfy himself of their suitability.